

BROMIC SMART-HEAT™ WIRELESS DIMMER CONTROLLER

Adding maximum control and convenience to your Smart-Heat™ Electric Range



7-CHANNEL WIRELESS REMOTE*

Bromic Heating's new Wireless Dimmer Control giving customers unprecedented control over heating output.

This unit allows the power output of an electric heater to be adjusted for perfect comfort, with the ability to adjust multiple units in unison with a single remote.


Each Smart-Heat™ Wireless Dimmer Control can manage up to 6800W of heating and can be used in 208VAC, 240VAC and 277VAC applications. Enclosed within an IP54-rated protective casing, our 7-channel transmitter allows users to dim or brighten their heaters at the touch of a button, offering customizable comfort and exceptional reliability.

*All Bromic Heating remotes are able to control an infinite number of heaters within a 100-foot range.



488888888888888888888888888888888888888		
Heater	Heater	
30A Power240V	Dimmer Control ^Wireless Remote	
^Optional Master Remote is available to control wireless Dimming Controllers. Talk to one of our Sales Executives today to find out more.		

SPECIFICATIONS	
Part Number	BH3130011-1
Power Supply	110/277VAC 50/60Hz (29A.max)
Max Output Power	6800W @ 277VAC (25A) 6800W @ 240VAC (28.5A.) 3080W @ 110VAC (28A.)
Fuse Protection	32A (FWC high speed)
Reception Frequency	916MHz
Operating Temperature Range	-4/86°F
Maximum Transmitters Memorized	42
Dimensions	9" x 7.9" x 2.95"
Protection Class	IP54

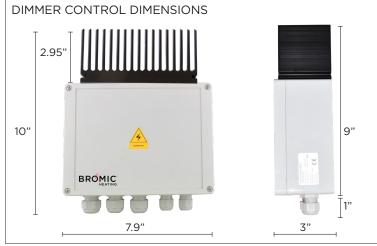

W: BROMIC.COM

USA 06/11/17

E: INFO@BROMIC.COM